


照度分布図


PH-T300-HT80

PH-T300-HT80 (60x90)

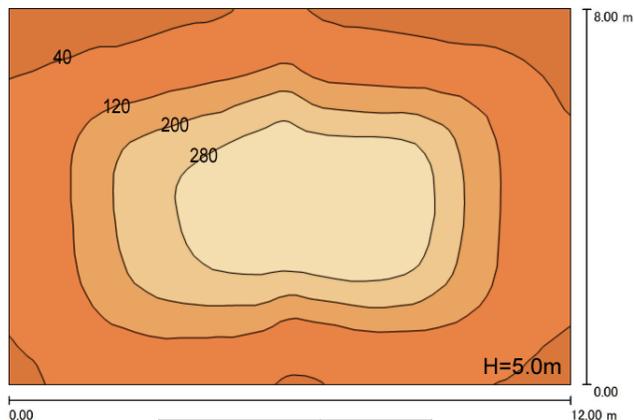


平均照度	149lx
直下照度	415lx

PH-T300-HT80 (60x135)



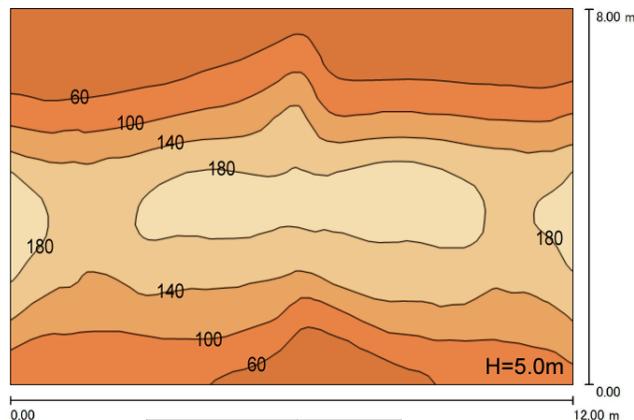


平均照度	115lx
直下照度	219lx

PH-T300-HT80 (85x150)

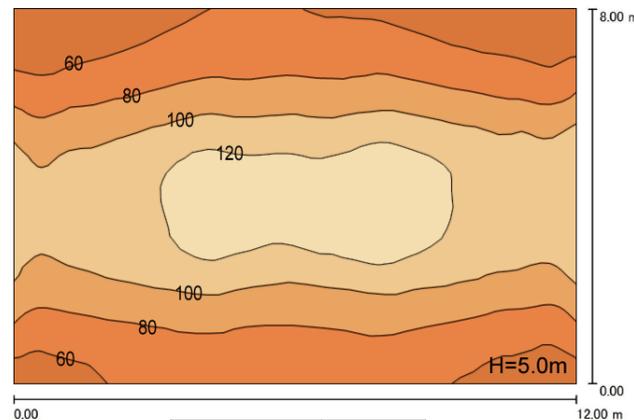

平均照度	91lx
直下照度	131lx

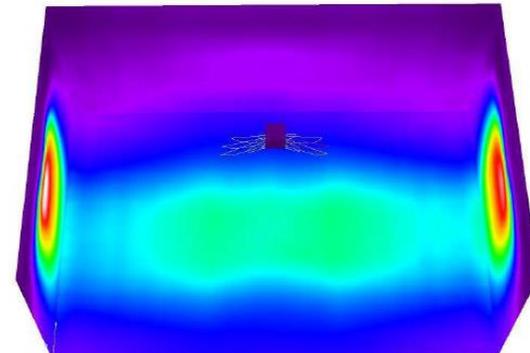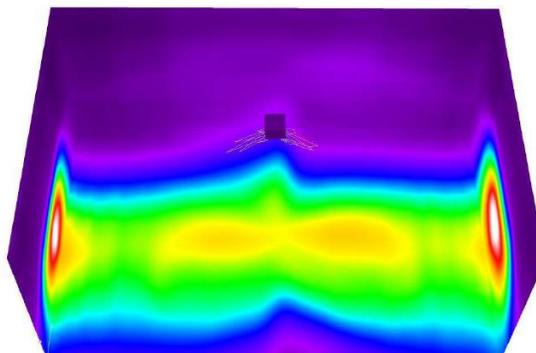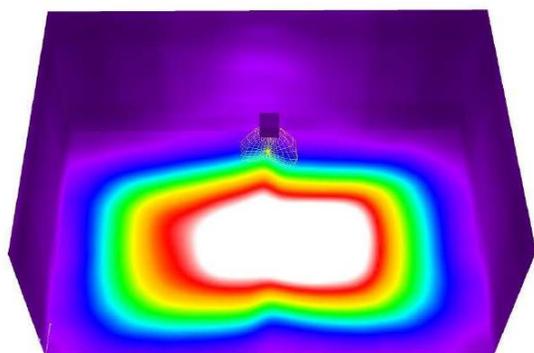


0 37.50 75 112.50 150 187.50 225 262.50 300 lx

【照度計算条件】部屋の広さ:12.0m×8.0m/高さ:5.0m/設置台数:1台/保守率:0.81

照度分布図


PH-T300-HT100

PH-T300-HT100 (60x90)

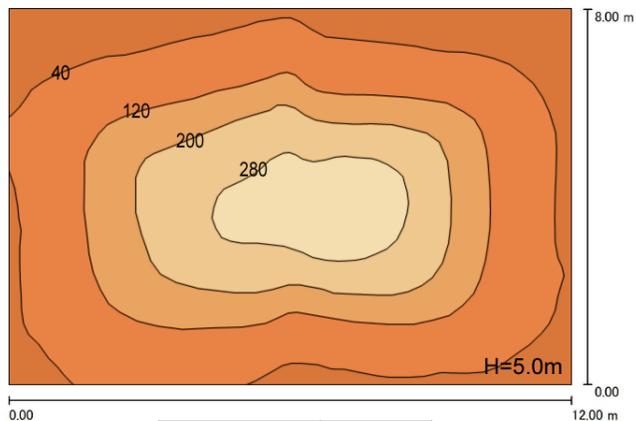


平均照度	125lx
直下照度	347lx

PH-T300-HT100 (60x135)



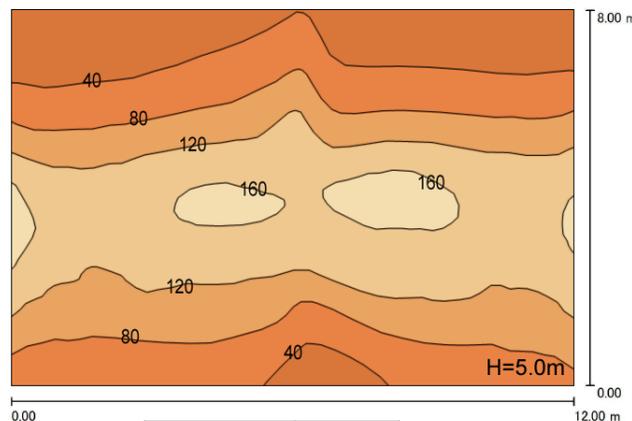


平均照度	96lx
直下照度	182lx

PH-T300-HT100 (85x150)

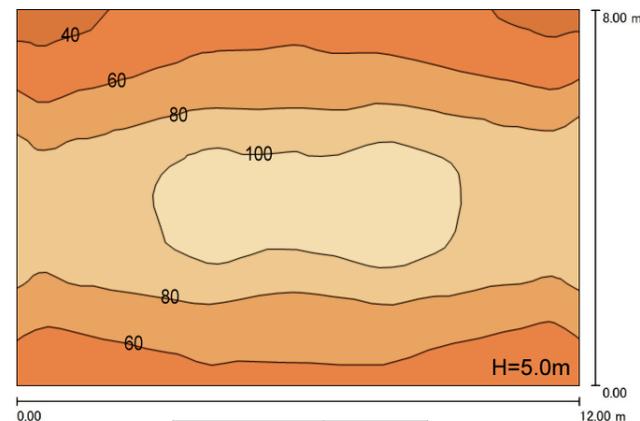

平均照度	77lx
直下照度	110lx

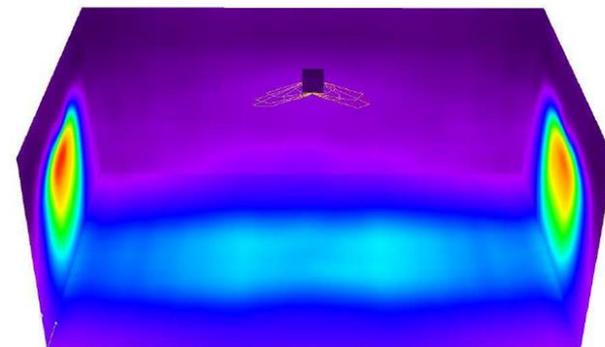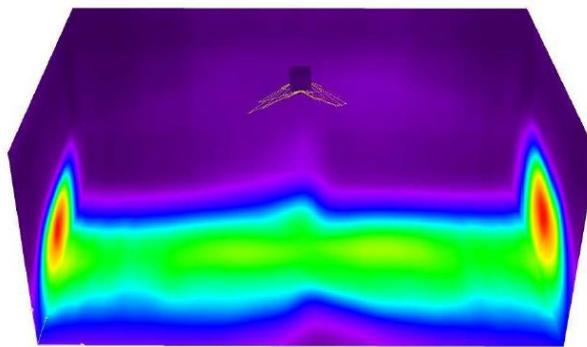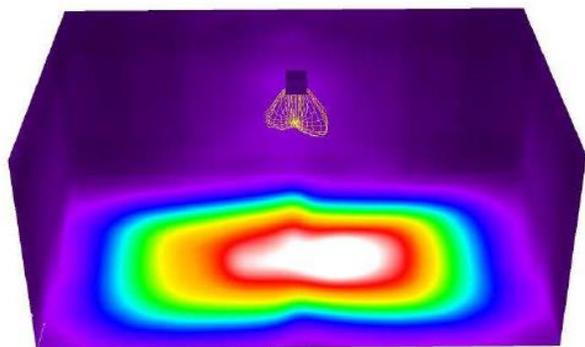

0 37.50 75 112.50 150 187.50 225 262.50 300 lx

【照度計算条件】部屋の広さ:12.0m×8.0m/高さ:5.0m/設置台数:1台/保守率:0.81